



Made in Germany



## Enquiry form

### Type:

- metal ridge vent single-sided
- metal ridge vent double-sided
- metal ridge vent "Design"

### Material:

- natural aluminium
- anthracite aluminium
- sepia aluminium
- brick-red aluminium
- zinc
- copper
- special colour: \_\_\_\_\_

### Length:

\_\_\_\_\_ linear meter

Please note: We only deliver pieces of 2 m length.

### Accessories:

- head ends \_\_\_\_\_ left \_\_\_\_\_ right
- connectors \_\_\_\_\_ set(s)  
Please note: A connector is needed every two meters.

### Customer address / company stamp:

\_\_\_\_\_ company

\_\_\_\_\_ name

\_\_\_\_\_ street

\_\_\_\_\_ postal code (ZIP) / city / country

**fax:** +49 (0)371 - 84243-19

**e-mail:** sarei@sarei.com

With compliments:

**SAREI Haus- und Dachtechnik GmbH**  
Mittelbacher Str. 12  
09224 Chemnitz  
GERMANY

**phone:** +49 (0)371 - 84243-0  
**fax:** +49 (0)371 - 84243-19  
**internet:** www.sarei.com  
**e-mail:** sarei@sarei.com


# Ridge ventilation



**Metal ridge vent**



**Metal ridge vent „Design“**



# Air circulation!?

**SAREI's metal ridge vents** provide an excellent air circulation, protection from influences of the weather and are very durable.

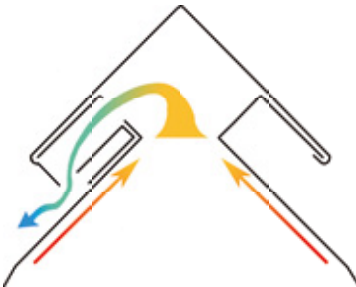
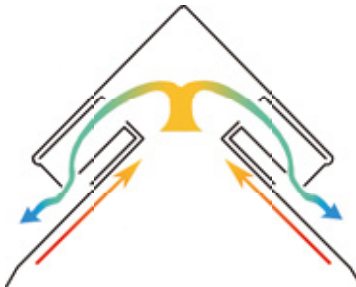
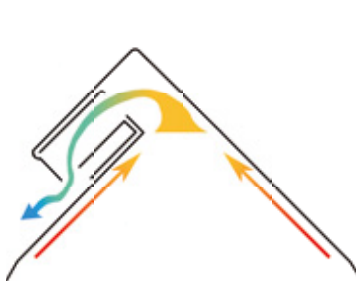
Proper air circulation extends the life of roofing systems by reducing moisture and heat that harms beams and insulation.

Due to its special construction, the metal ridge vent offers protection against rain and snow. Foliage, insects and snowflakes can not ingress - even during the windy seasons.


Additionally, **SAREI metal ridge vents** give your roof a visually appealing finish.

- proper air circulation
- effective protection against influences of the weather
- durable weather-proof material
- no contamination of the ventilation opening caused by insects or dust
- different types and colours available

# Types

<b>metal ridge vent single-sided</b>  ventilating cross-section: approx. 85,5 cm <sup>2</sup> / linear meter	<b>Technical data:</b>  <b>Material:</b> - aluminium with double-layer polyesterpaint - natural aluminium - titanium zinc - copper  <b>Colour:</b> Available in anthracite, brick-red and sepia brown. Please ask for other colours.  <b>Roof pitch:</b> Suitable for all roofs with a minimum slope of 15°.  <b>Length:</b> 2 meters  <b>Application:</b> Suitable for roofs with slate and bitumen shingles.  <b>Accessories:</b> head ends, connector sets
<b>metal ridge vent double-sided</b>  ventilating cross-section: approx. 170 cm <sup>2</sup> / linear meter	
<b>metal ridge vent "Design"</b>  ventilating cross-section: ca. 85,5 cm <sup>2</sup> / linear meter	

# Installation instructions

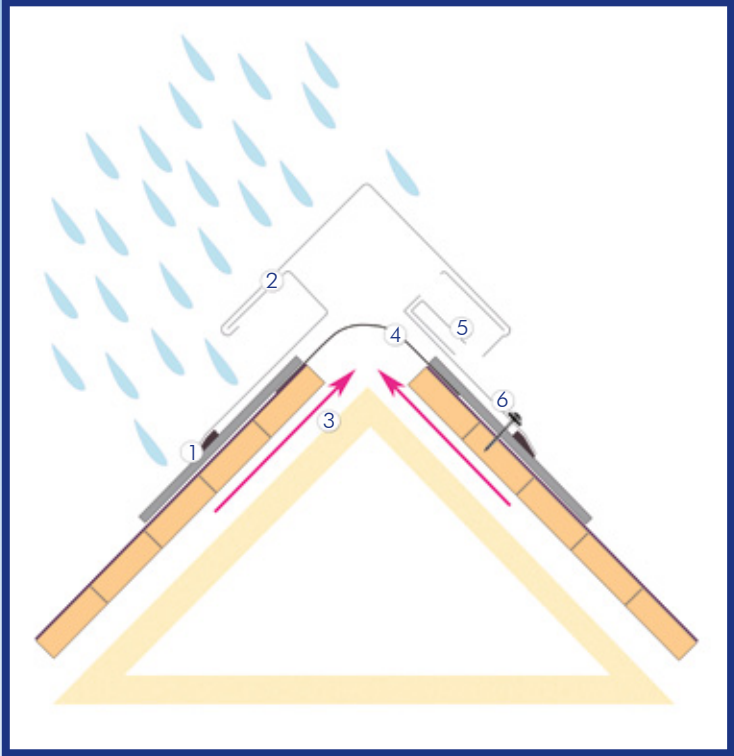

- ① sealing strip (for roofs with slate)
- ② closed weather side
- ③ rear ventilation of roof space
- ④ insect protection
- ⑤ snow stop
- ⑥ fastening: high-grade steel screws with rosettes and rubber washers

The ultimate consumer bears responsibility for professional and properly mounting of the ridge vent. Neither the producer, nor the trader can be held responsible for improper mounting!